


OPIC
OFFICE DE LA PROPRIÉTÉ
INTELLECTUELLE DU CANADA




CIPO
CANADIAN INTELLECTUAL
PROPERTY OFFICE

(12) (19) (CA) **Demande-Application**

(21) (A1) **2,223,660**
(22) 1997/12/04
(43) 1998/07/13

(72) ARMITAGE, Scott T., US
(71) MICRO EAR TECHNOLOGY, INC. d/b/a MICRO-TECH, US
(51) Int.Cl.⁶ H04R 25/00, G06F 19/00
(30) 1997/01/13 (08/782,328) US
(54) **SYSTEME DE PROGRAMMATION DE PROTHESES
AUDITIVES**
(54) **SYSTEM FOR PROGRAMMING HEARING AIDS**

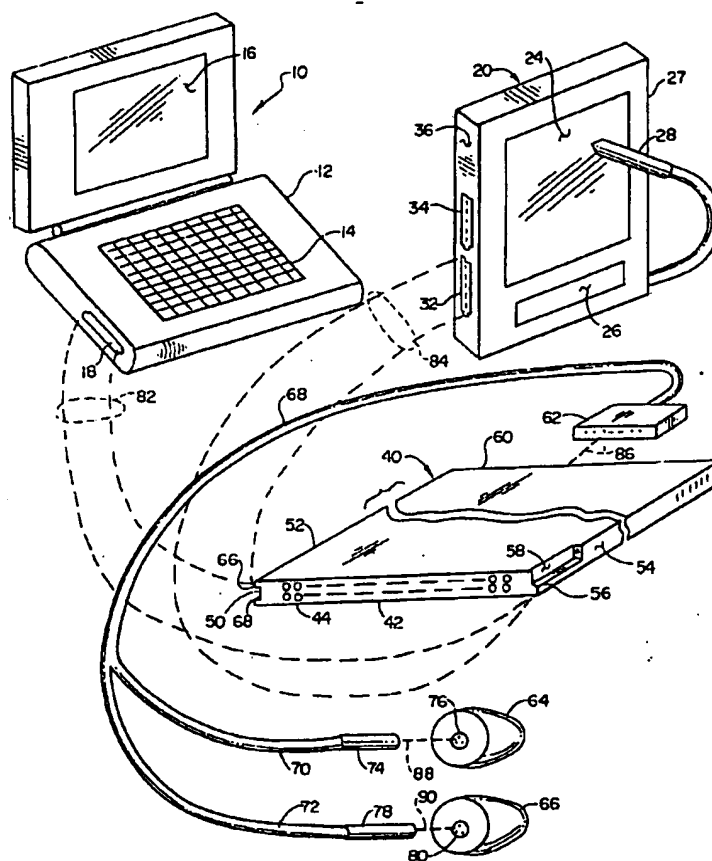

(57) L'invention est un système de programmation amélioré pour prothèses auditives qui utilise un ordinateur hôte sur lequel le programme est installé et un port servant à recevoir une carte PCMCIA (Personal Computer Memory Card International Association) utilisée par l'ordinateur hôte pour contrôler la programmation d'une prothèse auditive. L'ordinateur hôte alimente la carte PCMCIA en électricité et la met à la masse d'une part, et effectue le téléchargement du logiciel de programmation de la prothèse auditive vers la

(57) An improved hearing aid programming system with a host computer for providing at least one hearing aid program and having at least one personal computer memory card international association (PCMCIA) defined port in combination with a PCMCIA card inserted in the port and arranged for interacting with the host computer for controlling programming of a hearing aid. The host computer provides power and ground to the PCMCIA card and provides for downloading the hearing aid programming software to the PCMCIA card upon





(21) (A1) **2,223,660**
(22) 1997/12/04
(43) 1998/07/13

carte PCMCIA au moment de l'initialisation d'autre part, Le logiciel de programmation est exécuté par un microprocesseur incorporé à la carte PCMCIA. Une interface servant à ajuster les tensions et les impédances est adaptée pour la transmission des signaux à la prothèse auditive à programmer.

initialization. A microprocessor on the PCMCIA card executes the programming software. A hearing aid interface for adjusting voltage levels and impedance levels is adapted for coupling signals to the hearing aid being programmed.

SYSTEM FOR PROGRAMMING HEARING AIDSBackground of the Invention

1. Field of the Invention

5 This invention relates generally to a programming system for programmable hearing aids; and, more particularly relates to a portable hearing aid programming system utilizing a portable host computer in conjunction with a plug-in programming Card that is powered by the host computer and
10 operates with a well-defined port to the host.

2. Description of the Prior Art

Hearing aids have been developed to ameliorate the effects of hearing losses in individuals. Hearing deficiencies can range from deafness to hearing losses where
15 the individual has impairment of responding to different frequencies of sound or to being able to differentiate sounds occurring simultaneously. The hearing aid in its most elementary form usually provides for auditory correction through the amplification and filtering of sound provided in
20 the environment with the intent that the individual can hear better than without the amplification.

Prior art hearing aids offering adjustable operational parameters to optimize hearing and comfort to the user have been developed. Parameters, such as volume or tone, may
25 easily be adjusted, and many hearing aids allow for the individual user to adjust these parameters. It is usual that an individual's hearing loss is not uniform over the entire

frequency spectrum of audible sound. An individual's hearing loss may be greater at higher frequency ranges than at lower frequencies. Recognizing these differentiations in hearing loss considerations between individuals, it has become common
5 for a hearing health professional to make measurements that will indicate the type of correction or assistance that will be the most beneficial to improve that individual's hearing capability. A variety of measurements may be taken, which can include establishing speech recognition scores, or measurement
10 of the individual's perceptive ability for differing sound frequencies and differing sound amplitudes. The resulting score data or amplitude/frequency response can be provided in tabular form or graphically represented, such that the individual's hearing loss may be compared to what would be
15 considered a more normal hearing response. To assist in improving the hearing of individuals, it has been found desirable to provide adjustable hearing aids wherein filtering parameters may be adjusted, and automatic gain control (AGC) parameters are adjustable.

20 With the development of micro-electronics and microprocessors, programmable hearing aids have become well-known. It is known for programmable hearing aids to have a digital control section which stores auditory parameters and which controls aspects of signal processing characteristics.
25 Such programmable hearing aids also have a signal processing section, which may be analog or digital, and which operates

under control of the control section to perform the signal processing or amplification to meet the needs of the individual.

Hearing aid programming systems have characteristically
5 fallen into two categories: (a) programming systems that are utilized at the manufacturer's plant or distribution center, or (b) programming systems that are utilized at the point of dispensing the hearing aid.

One type of programming system for programming hearing
10 aids are the stand-alone programmers that are self-contained and are designed to provide the designed programming capabilities. Examples of the stand-alone programmers are the Sigma 4000, available commercially from Unitron of Kitchenor, Ontario, Canada, and the Solo II available commercially from
15 dbc-mifco of Portsmouth, New Hampshire. It is apparent that stand-alone programmers are custom designed to provide the programming functions known at the time. Stand-alone programmers tend to be inflexible and difficult to update and modify, thereby raising the cost to stay current. Further,
20 such stand-alone programmers are normally designed for handling a limited number of hearing aid types and lack versatility. Should there be an error in the system that provides the programming, such stand-alone systems tend to be difficult to repair or upgrade.

25 Another type of programming system is one in which the programmer is connected to other computing equipment. An

example of cable interconnection programming systems is the Hi Pro, available from Madsen of Copenhagen, Denmark. A system where multiple programming units are connected via telephone lines to a central computer is described in U.S. Patent No. 5,226,086 to J. C. Platt. Another example of a programming system that allows interchangeable programming systems driven by a personal computer is described in U.S. Patent No. 5,144,674 to W. Meyer et al. Other U.S. patents that suggest the use of some form of computing device coupled to an external hearing aid programming device are U.S. Patent No. 4,425,481 to Mansgold et al.; U.S. Patent No. 5,226,086 to Platt; U.S. Patent No. 5,083,312 to Newton et al.; and U.S. Patent No. 4,947,432 to Tøtholm. Programming systems that are cable-coupled or otherwise coupled to supporting computing equipment tend to be relatively expensive in that such programming equipment must have its own power supply, power cord, housing, and circuitry, thereby making the hearing aid programmer large and not as readily transportable as is desirable.

Yet another type of hearing aid programmer available in the prior art is a programmer that is designed to install into and become part of a larger computing system. An example of such a plug-in system is available commercially and is known as the UX Solo available from dbc-mifco. Hearing aid programmers of the type that plug into larger computers are generally designed to be compatible with the expansion ports

on a specific computer. Past systems have generally been designed to plug into the bus structure known as the Industry Standard Architecture (ISA) which has primarily found application in computers available from IBM. The ISA
5 expansion bus is not available on many present-day hand-held or lap top computers. Further, plugging cards into available ISA expansion ports requires opening the computer cabinet and appropriately installing the expansion card.

It can be seen then that the prior art systems do not
10 readily provide for a hearing aid programming system that can be easily affixed to a personal computer such as a lap top computer or a hand-held computer for rendering the entire programming system easily operable and easily transportable. Further, the prior art systems tend to be relatively more
15 expensive, and are not designed to allow modification or enhancement of the software while maintaining the simplicity of operation.

Summary of the Invention

The primary objective of the invention in providing a
20 small, highly transportable, inexpensive, and versatile system for programming hearing aids is accomplished through the use of host computer means for providing at least one hearing aid program, where the host computer means includes at least one uniformly specified expansion port for providing power
25 circuits, data circuits, and control circuits, and a pluggable card means coupled to the specified port for interacting with

the host computer means for controlling programming of at least one hearing aid, the programming system including coupling means for coupling the card means to at least one hearing aid to be programmed.

5 Another primary objective of the invention is to utilize a standardized specification defining the port architecture for the host computer, wherein the hearing aid programming system can utilize any host computer that incorporates the standardized port architecture. In this regard, the personal
10 computer memory card international association (PCMCIA) specification for the port technology allows the host computer to be selected from lap top computers, notebook computers, or hand-held computers where such PCMCIA ports are available and supported. With the present invention, it is no longer needed
15 to provide general purpose computers, either at the location of the hearing health professional, or at the factory or distribution center of the manufacturer of the hearing aids to support the programming function.

Another objective of the invention is to provide a highly
20 portable system for programming hearing aids to thereby allow ease of usage by hearing health professionals at the point of distribution of hearing aids to individuals requiring hearing aid support. To this end, the programming circuitry is fabricated on a Card that is pluggable to a PCMCIA socket in
25 the host computer and is operable from the power supplied by the host computer.

Yet another object of the invention is to provide an improved hearing aid programming system that utilizes standardized drivers within the host computer in this aspect of the invention, the PCMCIA card means includes a card
5 information structure (CIS) that identifies the host computer of the identification and configuration requirements of the programming circuits on the card. In one embodiment, the CIS identifies the PCMCIA Card as a serial port such that standardized serial port drivers in the host computer can
10 service the PCMCIA Card. In another embodiment, the CIS identifies the PCMCIA Card as a unique type of hearing aid programmer card such that the host computer would utilize drivers supplied specifically for use with that card. In another embodiment, the CIS identifies the PCMCIA Card as a
15 memory card, thereby indicating to the host computer that the memory card drivers will be utilized. Through the use of the standardized PCMCIA architecture and drivers, the PCMCIA Card can be utilized with any host computer that is adapted to support the PCMCIA architecture.

20 Still another object of the invention is to provide a hearing aid programming system that can be readily programmed and in which the adjustment programs can be easily modified to correct errors. In one aspect of the invention, the programming software is stored in the memory of a host
25 computer and is available for ease of modification or debugging on the host computer. In operation, then, the

programming software is downloaded to the PCMCIA Card when the Card is inserted in the host computer. In another embodiment, the programming software is stored on the PCMCIA Card in nonvolatile storage and is immediately available without
5 downloading upon insertion of the Card. In this latter configuration and embodiment, the nonvolatile storage means can be selected from various programmable devices that may be alterable by the host computer. In one arrangement, the nonvolatile storage device is electrically erasable
10 programmable read-only memory (EEPROM).

Another objective of the invention is to provide an improved hearing aid programming system wherein the hearing aid programming circuitry is mounted on a Card that meets the physical design specifications provided by PCMCIA. To this
15 end, the Card is fabricated to the specifications of either a Type I Card, a Type II Card, or a Type III Card depending upon the physical size constraints of the components utilized.

Yet another objective of the invention is to provide an improved hearing aid programming system wherein the type of
20 hearing aid being programmed can be identified. In this embodiment, a coupling means for coupling the hearing aid programming circuitry to the hearing aid or hearing aids being programmed includes cable means for determining the type of hearing aid being programmed and for providing hearing aid
25 identification signals to the host computer.

These and other more detailed and specific objectives and an understanding of the invention will become apparent from a consideration of the following Detailed Description of the Preferred Embodiment in view of the Drawings.

5

Brief Description of the Drawings

FIG. 1 is a pictorial view of an improved hearing aid programming system of this invention;

FIG. 2 is a perspective view of a Type I plug-in Card;

10 FIG. 3 is a perspective view of a Type II plug-in Card;

FIG. 4 is a perspective view of a Type III plug-in Card;

FIG. 5 is a diagram representing the PCMCIA architecture;

FIG. 6 is a block diagram illustrating the functional interrelationship of a host computer and the Card used for
15 programming hearing aids; and

FIG. 7 is a functional block diagram of the hearing aid programming Card.

20

Detailed Description of the Preferred Embodiment .

It is generally known that a person's hearing loss is not normally uniform over the entire frequency spectrum of hearing. For example, in typical noise-induced hearing loss, that the hearing loss is greater at higher frequencies than at
25 lower frequencies. The degree of hearing loss at various

frequencies varies with individuals. The measurement of an individual's hearing ability can be illustrated by an audiogram. An audiologist, or other hearing health professionals, will measure an individual's perceptive ability for differing sound frequencies and differing sound amplitudes. A plot of the resulting information in an amplitude/frequency diagram will graphically represent the individual's hearing ability, and will thereby represent the individual's hearing loss as compared to an established range of normal hearing for individuals. In this regard, the audiogram represents graphically the particular auditory characteristics of the individual. Other types of measurements relating to hearing deficiencies may be made. For example, speech recognition scores can be utilized. It is understood that the auditory characteristics of an individual or other measured hearing responses may be represented by data that can be represented in various tabular forms as well as in the graphical representation.

Basically a hearing aid consists of a sound actuatable microphone for converting environmental sounds into an electrical signal. The electrical signal is supplied to an amplifier for providing an amplified output signal. The amplified output signal is applied to a receiver that acts as a loudspeaker for converting the amplified electrical signal into sound that is transmitted to the individual's ear. The various kinds of hearing aids can be configured to be

"completely in the canal" known as the CIC type of hearing aid. Hearing aids can also be embodied in configurations such as "in the ear", "in the canal", "behind the ear", embodied in an eyeglass frame, worn on the body, and surgically implanted.

- 5 Each of the various types of hearing aids have differing functional and aesthetic characteristics.

Since individuals have differing hearing abilities with respect to each other, and oftentimes have differing hearing abilities between the right and left ears, it is normal to
10 have some form of adjustment to compensate for the characteristics of the hearing of the individual. It has been known to provide an adjustable filter for use in conjunction with the amplifier for modifying the amplifying characteristics of the hearing aid. Various forms of physical
15 adjustment for adjusting variable resistors or capacitors have been used. With the advent of microcircuitry, the ability to program hearing aids has become well-known. A programmable hearing aid typically has a digital control section and a signal processing section. The digital control section is
20 adapted to store an auditory parameter, or a set of auditory parameters, which will control an aspect or set of aspects of the amplifying characteristics, or other characteristics, of the hearing aid. The signal processing section of the hearing aid then will operate in response to the control section to
25 perform the actual signal processing, or amplification, it

being understood that the signal processing may be digital or analog.

Numerous types of programmable hearing aids are known. As such, details of the specifics of programming functions will not be described in detail. To accomplish the programming, it has been known to have the manufacturer establish a computer-based programming function at its factory or outlet centers. In this form of operation, the details of the individual's hearing readings, such as the audiogram, are forwarded to the manufacturer for use in making the programming adjustments. Once adjusted, the hearing aid or hearing aids are then sent to the intended user. Such an operation clearly suffers from the disadvantage of the loss of time in the transmission of the information and the return of the adjusted hearing aid, as well as not being able to provide inexpensive and timely adjustments with the individual user. Such arrangements characteristically deal only with the programming of the particular manufacturer's hearing aids, and are not readily adaptable for adjusting or programming various types of hearing aids.

Yet another type of prior art programming system is utilized wherein the programming system is located near the hearing health professional who would like to program the hearing aid for patients. In such an arrangement, it is common for each location to have a general purpose computer especially programmed to perform the programming function and

provide it with an interface unit hard-wired to the computer for providing the programming function to the hearing aid. In this arrangement, the hearing professional enters the audiogram or other patient-related hearing information into the computer, and thereby allows the computer to calculate the auditory parameters that will be optimal for the predetermined listening situations for the individual. The computer then directly programs the hearing aid. Such specific programming systems and hard-wired interrelationship to the host computer are costly and do not lend themselves to ease of altering the programming functions.

Other types of programming systems wherein centralized host computers are used to provide programming access via telephone lines and the like are also known, and suffer from many of the problems of cost, lack of ease of usage, lack of flexibility in reprogramming, and the like.

A number of these prior art programmable systems have been identified above, and their respective functionalities will not be further described in detail.

The system and method of programming hearing aids of the present invention provides a mechanism where all of the hearing aid programming system can be economically located at the office of each hearing health professional, thereby overcoming many of the described deficiencies of prior art programming systems.

A group of computing devices, including lap top computers, notebook computers, hand-held computers, such as the APPLE® NEWTON®, and the like, which can collectively be referenced as host computers are adapted to support the
5 Personal Computer Memory Card International Association Technology, and which is generally referred to as PCMCIA. In general, PCMCIA provides one or more standardized ports in the host computer where such ports are arranged to cooperate with associated PCMCIA PC cards, hereinafter referred to as
10 "Cards". The Cards are utilized to provide various functions, and the functionality of PCMCIA will be described in more detail below. The PCMCIA specification defines a standard for integrated circuit Cards to be used to promote interchangeability among a variety of computer and electronic
15 products. Attention is given to low cost, ruggedness, low power consumption, light weight, and portability of operation.

The specific size of the various configurations of Cards will be described in more detail below, but in general, it is understood that it will be comparable in size to credit cards,
20 thereby achieving the goal of ease of handling. Other goals of PCMCIA technology can be simply stated to require that (1) it must be simple to configure, and support multiple peripheral devices; (2) it must be hardware and operating environment independent; (3) installation must be flexible;
25 and (4) it must be inexpensive to support the various peripheral devices. These goals and objectives of PCMCIA

specification requirements and available technology are consistent with the goals of this invention of providing an improved highly portable, inexpensive, adaptable hearing aid programming system. The PCMCIA technology is expanding into
5 personal computers and work stations, and it is understood that where such capability is present, the attributes of this invention are applicable. Various aspects of PCMCIA will be described below at points to render the description meaningful to the invention.

10 FIG. 1 is a pictorial view of an improved hearing aid programming system of this invention. A host computer 10, which can be selected from among lap top computers; notebook computers; personal computers; work station computers; or the like, includes a body portion 12, a control keyboard portion
15 14, and a display portion 16. While only one PCMCIA port 18 is illustrated, it is understood that such ports may occur in pairs. Various types of host computers 10 are available commercially from various manufacturers, including, but not limited to, International Business Machines and Apple
20 Computer, Inc. Another type of host computer is the hand-held computer 20 such as the APPLE® NEWTON®, or equivalent. The hand-held host 20 includes a body portion 22, a screen portion 24, a set of controls 26 and a stylus 28. The stylus 28 operates as a means for providing information to the hand-held
25 host computer 20 by interaction with screen 24. A pair of PCMCIA ports 32 and 34 are illustrated aligned along one side

36 of the hand-held host computer 20. Again, it should be understood that more or fewer PCMCIA ports may be utilized. Further, it will be understood that it is possible for the PCMCIA ports to be position in parallel and adjacent to one
5 another as distinguished from the linear position illustrated. A hand-held host computer is available from various sources, such as the Newton model available from Apple Computer, Inc.

A PCMCIA Card 40 has a first end 42 in which a number of contacts 44 are mounted. In the standard, the contacts 44 are
10 arranged in two parallel rows and number sixty-eight contacts. The outer end 60 has a connector (not shown in this figure) to cooperate with mating connector 62. This interconnection provide signals to and from hearing aids 64 and 66 via cable 68 which splits into cable ends 70 and 72. Cable portion 70
15 has connector 74 affixed thereto and adapted for cooperation with jack 76 in hearing aid 64. Similarly, cable 72 has connector 78 that is adapted for cooperation with jack 80 in hearing aid 66. This configuration allows for programming of hearing aid 64 and 66 in the ears of the individual to use
20 them, it being understood that the cable interconnection may alternatively be a single cable for a single hearing aid or two separate cables with two separations to the Card 40.

It is apparent that card 40 and the various components are not shown in scale with one another, and that the dashed
25 lines represent directions of interconnection. In this regard, a selection can be made between portable host 10 or

hand-held host 20. If host 10 is selected, card 40 is moved in the direction of dashed lines 82 for insertion in PCMCIA slot 18. Alternatively, if a hand-held host 20 is to be used, Card 40 is moved along dashed lines 84 for insertion in PCMCIA slot 32. Connector 62 can be moved along dashed line 86 for mating with the connector (not shown) at end 60 of card 40. Connector 74 can be moved along line 88 for contacting jack 76, and connector 78 can be moved along dashed line 90 for contacting jack 80. There are three standardized configurations of Card 40 plus one nonstandard form that will not be described.

FIG. 2 is a perspective view of a Type I plug-in Card. The physical configurations and requirements of the various Card types are specified in the PCMCIA specification to assure portability and consistency of operation. Type I Card 40I has a width W1 of 54 millimeters and a thickness T1 of 3.3 millimeters. Other elements illustrated bear the same reference numerals as in FIG. 1.

FIG. 3 is a perspective view of a Type II plug-in Card. Card 40II has a width W2 of 54 millimeters and has a raised portion 100. With the raised portion, the thickness T2 is 5.0 millimeters. The width W3 of raised portion 100 is 48 millimeters. The purpose of raised portion 100 is to provide room for circuitry to be mounted on the surface 102 of card 40II.

FIG. 4 is a perspective view of a Type III plug-in Card. Card 40III has a width W4 of 54 millimeters, and an overall thickness T3 of 10.5 millimeters. Raised portion 104 has a width W5 of 51 millimeters, and with the additional depth 5 above the upper surface 106 allows for even larger components to be mounted.

Type II Cards are the most prevalent in usage, and allow for the most flexibility in use in pairs with stacked PCMCIA ports.

10 The PCMCIA slot includes two rows of 34 pins each. The connector on the Card is adapted to cooperate with these pins. There are three groupings of pins that vary in length. This results in a sequence of operation as the Card is inserted into the slot. The longest pins make contact first, the 15 intermediate length pins make contact second, and the shortest pins make contact last. The sequencing of pin lengths allow the host system to properly sequence application of power and ground to the Card. It is not necessary for an understanding of the invention to consider the sequencing in detail, it 20 being automatically handled as the Card is inserted. Functionally, the shortest pins are the card detect pins and are responsible for routing signals that inform software running on the host of the insertion or removal of a Card. The shortest pins result in this operation occurring last, and 25 functions only after the Card has been fully inserted. It is not necessary for an understanding of the invention that each

pin and its function be considered in detail, it being understood that power and ground is provided from the host to the Card.

FIG. 5 is a diagram representing the PCMCIA architecture.

5 The PCMCIA architecture is well-defined and is substantially available on any host computer that is adapted to support the PCMCIA architecture. For purposes of understanding the invention, it is not necessary that the intricate details of the PCMCIA architecture be defined herein, since they are
10 substantially available in the commercial marketplace. It is, however, desirable to understand some basic fundamentals of the PCMCIA architecture in order to appreciate the operation of the invention.

In general terms, the PCMCIA architecture defines various
15 interfaces and services that allow application software to configure Card resources into the system for use by system-level utilities and applications. The PCMCIA hardware and related PCMCIA handlers within the system function as enabling technologies for the Card.

20 Resources that are capable of being configured or mapped from the PCMCIA bus to the system bus are memory configurations, input/output (I/O) ranges and Interrupt Request Lines (IRQs). Details concerning the PCMCIA architecture can be derived from the specification available
25 from PCMCIA Committee, as well as various vendors that supply PCMCIA components or software commercially.

The PCMCIA architecture involves a consideration of hardware 200 and layers of software 202. Within the hardware consideration, Card 204 is coupled to PCMCIA socket 206 and Card 208 is coupled to PCMCIA socket 210. Sockets 206 and 210
5 are coupled to the PCMCIA bus 212 which in turn is coupled to the PCMCIA controller 214. Controllers are provided commercially by a number of vendors. The controller 214 is programmed to carry out the functions of the PCMCIA architecture, and responds to internal and external stimuli.
10 Controller 214 is coupled to the system bus 216. The system bus 216 is a set of electrical paths within a host computer over which control signals, address signals, and data signals are transmitted. The control signals are the basis for the protocol established to place data signals on the bus and to
15 read data signals from the bus. The address lines are controlled by various devices that are connected to the bus and are utilized to refer to particular memory locations or I/O locations. The data lines are used to pass actual data signals between devices.
20 The PCMCIA bus 212 utilizes 26 address lines and 16 data lines.

Within the software 202 consideration, there are levels of software abstractions. The Socket Services 218 is the first level in the software architecture and is responsible
25 for software abstraction of the PCMCIA sockets 206 and 210. In general, Socket Services 218 will be applicable to a

particular controller 214. In general, Socket Services 218 uses a register set (not shown) to pass arguments and return status. When interrupts are processed with proper register settings, Socket Services gains control and attempts to
5 perform functions specified at the Application Program Interfaces (API).

Card Services 220 is the next level of abstraction defined by PCMCIA and provides for PCMCIA system initialization, central resource management for PCMCIA, and
10 APIs for Card configuration and client management. Card Services is event-driven and notifies clients of hardware events and responds to client requests. Card Services 220 is also the manager of resources available to PCMCIA clients and is responsible for managing data and assignment of resources
15 to a Card. Card Services assigns particular resources to Cards on the condition that the Card Information Structure (CIS) indicates that they are supported. Once resources are configured to a Card, the Card can be accessed as if it were a device in the system. Card Services has an array of
20 Application Program Interfaces to provide the various required functions.

Memory Technology Driver 1 (MTD) 222, Memory Technology Driver 2, label 224, and Memory Technology Driver N, label 226, are handlers directly responsible for reading and writing
25 of specific memory technology memory Cards. These include standard drivers and specially designed drivers if required.

Card Services 220 has a variety of clients such as File System Memory clients 228 that deal with file system aware structures; Memory Clients 230, Input/Output Clients 232; and Miscellaneous Clients 234.

5 FIG. 6 is a block diagram illustrating the functional interrelationship of a host computer and a Card used for programming hearing aids. A Host 236 has an Operating System 238. A Program Memory 240 is available for storing the hearing aid programming software. The PCMCIA block 242
10 indicates that the Host 236 supports the PCMCIA architecture. A User Input 244 provides input control to Host 236 for selecting hearing aid programming functions and providing data input to Host 236. A Display 246 provides output representations for visual observation. PCMCIA socket 248
15 cooperates with PCMCIA jack 250 mounted on Card 252.

On Card 252 there is a PCMCIA Interface 254 that is coupled to jack 250 via lines 256, where lines 256 include circuits for providing power and ground connections from Host 236, and circuits for providing address signals, data signals,
20 and control signals. The PCMCIA Interface 254 includes the Card Information Structure (CIS) that is utilized for providing signals to Host 236 indicative of the nature of the Card and setting configuration parameters. The CIS contains information and data specific to the Card, and the components
25 of information in CIS is comprised of tuples, where each tuple is a segment of data structure that describes a specific

aspect or configuration relative to the Card. It is this information that will determine whether the Card is to be treated as a standard serial data port, a standard memory card, a unique programming card or the like. The combination
5 of tuples is a metaformat.

A Microprocessor shown within dashed block 260 includes a Processor Unit 262 that receives signals from PCMCIA Interface 254 over lines 264 and provides signals to the Interface over lines 266. An onboard memory system 268 is
10 provided for use in storing program instructions. In the embodiment of the circuit, the Memory 268 is a volatile static random access memory (SRAM) unit of 1K capacity. A Nonvolatile Memory 370 is provided. The Nonvolatile Memory is 0.5K and is utilized to store initialization instructions that
15 are activated upon insertion of Card 352 into socket 348. This initialization software is often referred to as "bootstrap" software in that the system is capable of pulling itself up into operation.

A second Memory System 272 is provided. This Memory is
20 coupled to Processor Unit 262 for storage of hearing aid programming software during the hearing aid programming operation. In a preferred embodiment, Memory 272 is a volatile SRAM having a 32K capacity. During the initialization phases, the programming software will be
25 transmitted from the Program Memory 240 of Host 236 and downloaded through the PCMCIA interface 254. In an

alternative embodiment, Memory System 272 can be a nonvolatile memory with the hearing aid programming software stored therein. Such nonvolatile memory can be selected from available memory systems such as Read Only Memory (ROM),
5 Programmable Read Only Memory (PROM), Erasable Programmable Read Only Memory (EPROM), or Electrically Erasable Programmable Read Only Memory (EEPROM). It is, of course, understood that Static Random Access Memory (SRAM) memory systems normally do not hold or retain data stored therein
10 when power is removed.

A Hearing Aid Interface 274 provides the selected signals over lines 274 to the interface connector 276. The Interface receives signals on lines 278 from the interface connector. In general, the Hearing Aid Interface 274 functions under
15 control of the Processor Unit 262 to select which hearing aid will be programmed, and to provide the digital to analog selections, and to provide the programmed impedance levels.

A jack 280 couples with connector 276 and provides electrical connection over lines 282 to jack 284 that couples
20 to hearing aid 286. In a similar manner, conductors 288 coupled to jack 290 for making electrical interconnection with hearing aid 292.

Assuming that Socket Services 218, Card Services 220 and appropriate drivers and handlers are appropriately loaded in
25 the Host 236, the hearing aid programming system is initialized by insertion of Card 252 into socket 248. The

insertion processing involves application of power signals first since they are connected with the longest pins. The next longest pins cause the data, address and various control signals to be made. Finally, when the card detect pin is
5 connected, there is a Card status change interrupt. Once stabilized, Card Services queries the status of the PCMCIA slot through the Socket Services, and if the state has changed, further processing continues. At this juncture, Card Services notifies the I/O clients which in turn issues
10 direction to Card Services to read the Card's CIS. The CIS tuples are transmitted to Card Services and a determination is made as to the identification of the Card 252 and the configurations specified. Depending upon the combination of tuples, that is, the metaformat, the Card 252 will be
15 identified to the Host 236 as a particular structure. In a preferred embodiment, Card 252 is identified as a serial memory port, thereby allowing Host 236 to treat with data transmissions to and from Card 252 on that basis. It is, of course, understood that Card 252 could be configured as a
20 serial data Card, a Memory Card or a unique programming Card thereby altering the control and communication between Host 236 and Card 252.

FIG. 7 is a functional block diagram of the hearing aid programming Card.

25 The PCMCIA jack 250 is coupled to PCMCIA Interface 254 via PCMCIA bus 256, and provides VCC power to the card via

line 256-1. The Microprocessor 260 is coupled to the Program Memory 272 via the Microprocessor Bus 260-1. A Reset Circuit 260-2 is coupled via line 260-3 to Microprocessor 260 and functions to reset the Microprocessor when power falls below
5 predetermined limits. A Crystal Oscillator 260-4 is coupled to Microprocessor 260 via line 260-5 and provides a predetermined operational frequency signal for use by Microprocessor 260.

The Hearing Aid Interface shown enclosed in dashed block
10 274 includes a Digital to Analog Converter 274-1 that is coupled to a Reference Voltage 274-2 via line 274-3. In a preferred embodiment, the Reference Voltage is established at 2.5 volts DC. Digital to Analog Converter 274-1 is coupled to Microprocessor Bus 260-1. The Digital to Analog Converter
15 functions to produce four analog voltages under control of the programming established by the Microprocessor.

One of the four analog voltages is provided on Line 274-5 to amplifier AL, labeled 274-6, which functions to convert 0 to reference voltage levels to 0 to 15 volt level signals. A
20 second voltage is provided on line 274-7 to amplifier AR, labeled 274-8, which provides a similar conversion of 0 volts to the reference voltage signals to 0 volts to 15 volt signals. A third voltage is provided on line 274-9 to the amplifier BL, labeled 274-10, and on line 274-11 to amplifier
25 BR, labeled 274-12. Amplifiers BL and BR convert 0 volt signals to reference voltage signals to 0 volts to 15 volt

signals and are used to supply power to the hearing aid being adjusted. In this regard, amplifier BL provides the voltage signals on line 278-3 to the Left hearing aid, and amplifier BR provides the selected voltage level signals on line 274-3
5 to the Right hearing aid.

An Analog Circuit Power Supply 274-13 provides predetermined power voltage levels to all analog circuits.

A pair of input Comparators CL labeled 274-14 and CR labeled 274-15 are provided to receive output signals from the
10 respective hearing aids. Comparator CL receives input signals from the Left hearing aid via line 278-4 and Comparator CR receives input signals from the Right hearing aid via line 274-4. The fourth analog voltage from Digital to Analog Converter 274-1 is provided on line 274-16 to Comparators CL
15 and CR.

A plurality of hearing aid programming circuit control lines pass from Microprocessor 260 and to the Microprocessor via lines 274-17. The output signals provided by comparators CL and CR advise Microprocessor 260 of parameters concerning
20 the CL and CR hearing aids respectively.

A Variable Impedance A circuit and Variable Impedance B circuit 274-20 each include a predetermined number of analog switches and a like number of resistance elements. In a preferred embodiment as will be described in more detail
25 below, each of these circuits includes eight analog switches and eight resistors. The output from amplifier AL is provided

to Variable Impedance A via line 274-21 and selection signals are provided via line 274-22. The combination of the voltage signal applied and the selection signals results in an output being provided to switch SW1 to provide the selected voltage
5 level. In a similar manner, the output from Amplifier R is provided on line 274-23 to Variable Impedance B 274-20, and with control signals on line 274-24, results in the selected voltage signals being applied to switch SW2.

Switches SW1 and SW2 are analog switches and are
10 essentially single pole double throw switches that are switched under control of signals provided on line 274-25. When the selection is to program the left hearing aid, switch SW1 will be in the position shown and the output signals from Variable Impedance A will be provided on line 278-1 to LF
15 hearing aid. At the same time, the output from Variable Impedance B 274-20 will be provided through switch SW2 to line 278-2. When it is determined that the Right hearing aid is to be programmed, the control signals on line 274-25 will cause switches SW1 and SW2 to switch. This will result in the
20 signal from Variable Impedance A to be provided on line 274-1, and the output from Variable Impedance B to be provided on line 274-2 to the Right hearing aid.

With the circuit elements shown, the program that resides in Program Memory 272 in conjunction with the control of
25 Microprocessor 260 will result in application of data and control signals that will read information from Left and Right

hearing aids, and will cause generation of the selection of application and the determination of levels of analog voltage signals that will be applied selectively the Left and Right hearing aids. A more detailed circuit diagram of the
5 functional elements will be set forth below.

It will be understood that this disclosure, in many respects, is only illustrative. Changes may be made in details, particularly in matters of shape, size, material, and arrangement of parts without exceeding the scope of the
10 invention. Accordingly, the scope of the invention is as defined in the language of the appended Claims.

What is claimed is:

1. An improved hearing aid programming system comprising:

host computer means for providing at least one hearing aid program, said host computer means including at least one personal computer memory card international association (PCMCIA) defined port means for providing power circuits, data circuits, and control circuits; PCMCIA card means coupled to said PCMCIA defined port means, for interacting with said host computer means for controlling programming of at least one hearing aid; and

coupling means for coupling said PCMCIA hearing aid programming means to at least one hearing aid to be programmed.

2. A hearing aid programming system as in Claim 1, wherein said host computer means comprises a personal computer.

3. A hearing aid programming system as in Claim 2, wherein said personal computer is a lap top computer.

4. A hearing aid programming system as in Claim 2, wherein said personal computer is a hand-held computer.

5. A hearing aid programming system as in Claim 2, wherein said PCMCIA card means is a PCMCIA defined card Type.

6. A hearing aid programming system as in Claim 5, wherein said PCMCIA defined card Type is a Type I card.

7. A hearing aid programming system as in Claim 5, wherein said PCMCIA defined card Type is a Type II card.

8. A hearing aid programming system as in Claim 5, wherein said PCMCIA defined card Type is a Type III card.

9. A hearing aid programming system as in Claim 1, wherein said PCMCIA card means includes card information structure (CIS) means for providing predetermined card identifications signals to said host computer means.

10. A hearing aid programming system as in Claim 9, wherein said predetermined card identification signals identify the PCMCIA card means as a serial data transmission port.

11. A hearing aid programming system as in Claim 9, wherein said predetermined card identification signals identify the PCMCIA card means as a memory card.

12. A hearing aid programming system as in Claim 9, wherein said predetermined card identification signals identify the PCMCIA card means as a programming card.

13. A hearing aid programming system as in Claim 9, wherein said PCMCIA card means includes:

volatile storage means for storing hearing aid programming software; and
nonvolatile storage means for storing initialization software to cause said host computer means to download hearing aid programming software to said volatile storage means.

14. A hearing aid programming system as in Claim 9, wherein said PCMCIA cards means includes:

first nonvolatile storage means for storing hearing aid programming software; and
second nonvolatile storage means for storing initialization software.

15. A hearing aid programming system as in Claim 1, wherein said coupling means includes cable means for determining the type of hearing aid being programmed and for providing hearing aid identification signals to said host computer means.

16. A hearing aid programming system as in Claim 2, wherein said host computer means comprises a hand-held computer.

17. For use with a host computer having a memory system for storing hearing aid programming software and operating system software, and at least one supported personal computer card international association (PCMCIA) defined port for providing power circuits, data circuits, and control circuits, a PCMCIA card comprising:

memory means for storing hearing aid programming software;

PCMCIA interface means coupled to the PCMCIA defined port for providing card information structure (CIS) signals indicative of the identification of the PCMCIA card and for providing interface control with the host computer;

microprocessor means coupled to said memory means and to said PCMCIA interface means for executing the hearing aid programming software; and

hearing aid interface means coupled to said microprocessor means for providing programming signals, whereby a hearing aid coupled thereto can be programmed.

18. A PCMCIA card as in Claim 17, wherein said memory means is a nonvolatile storage system.

19. A PCMCIA card as in Claim 17, wherein said memory means is a volatile storage system.

20. A PCMCIA card as in Claim 19, and further including: non volatile memory means coupled to said microprocessor means for storing initialization software to cause the host computer to download the hearing aid programming software to said memory means.

21. A PCMCIA card as in Claim 17, wherein the PCMCIA card is a PCMCIA defined card Type.

22. A PCMCIA card as in Claim 18, wherein said PCMCIA defined card Type is a Type I card.

23. A PCMCIA card as in Claim 18, wherein said PCMCIA defined card Type is a Type II card.

24. A PCMCIA card as in Claim 18, wherein said PCMCIA defined card Type is a Type III card.

25. A PCMCIA card as in Claim 17, wherein said card identification signals identify the PCMCIA card as a serial data transmission port.

26. A PCMCIA card as in Claim 17, wherein said predetermined card identification signals identify the PCMCIA card as a memory card.

27. A PCMCIA card as in Claim 17, wherein said card identification signals identify the PCMCIA card as a programming card.

28. A PCMCIA card as in Claim 17, and further including coupling means for coupling said hearing aid interface means to a hearing aid.

29. A PCMCIA card as in Claim 28, wherein said coupling means includes cable means for determining the type of hearing aid being programmed and for providing hearing aid identification signals to the host computer.

30. For use with a host computer having a PCMCIA port, a memory for storing programs, and operating with an operating system, a hearing programmer system comprising:

host interface means for providing communication with the PCMCIA port and for providing configuration control

signals to the host computer for use by the operating system to verify the configuration and for receiving power and signals from the host computer;
processor means coupled to said host interface means for performing hearing aid programming functions;
initialization means coupled to processor means for causing said processor means to request downloading of the programming software from the host computer memory;
memory means coupled to said processor means for storing the programming software downloaded from the host computer;
hearing aid interface means coupled to said processor means for providing programming signals to a hearing aid to be programmed and for receiving control signals from a hearing aid to be programmed; and
coupling means for coupling said hearing aid interface to a hearing aid to be programmed.

31. A hearing aid programming system as in Claim 30, wherein said host interface means includes card information structure means for identifying the characteristics of the hearing aid programming system.

32. A hearing aid programming system as in Claim 31, wherein said initialization means includes:

nonvolatile storage means for storing initialization instructions for controlling initialization of said processor means.

33. A hearing aid programming system as in Claim 32, wherein said initialization instructions include instructions for responding to said processor means for downloading said programming software and for storing said programming software in said memory means.

34. A hearing aid programming system as in Claim 33 wherein said processor means retrieves said programming software from said memory means and executes said programming software.

Abstract of the Disclosure

An improved hearing aid programming system with a host computer for providing at least one hearing aid program and having at least one personal computer memory card international association (PCMCIA) defined port in combination with a PCMCIA card inserted in the port and arranged for interacting with the host computer for controlling programming of a hearing aid. The host computer provides power and ground to the PCMCIA card and provides for downloading the hearing aid programming software to the PCMCIA card upon initialization. A microprocessor on the PCMCIA card executes the programming software. A hearing aid interface for adjusting voltage levels and impedance levels is adapted for coupling signals to the hearing aid being programmed.

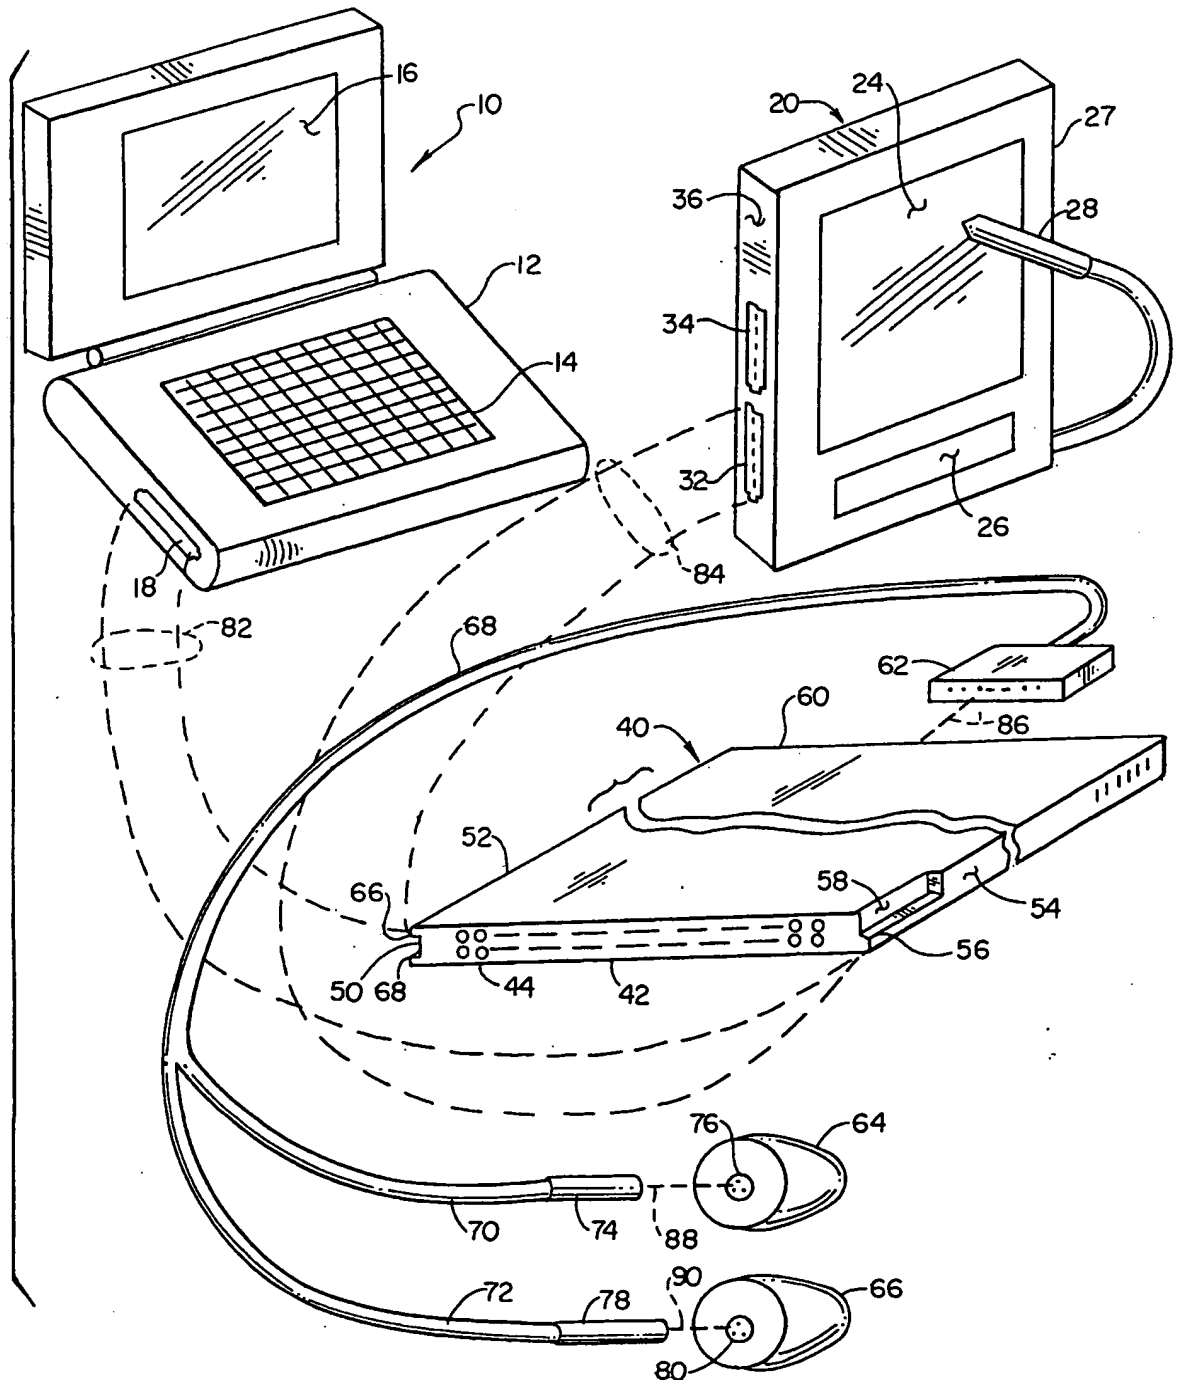
Fig. 1

Fig. 2

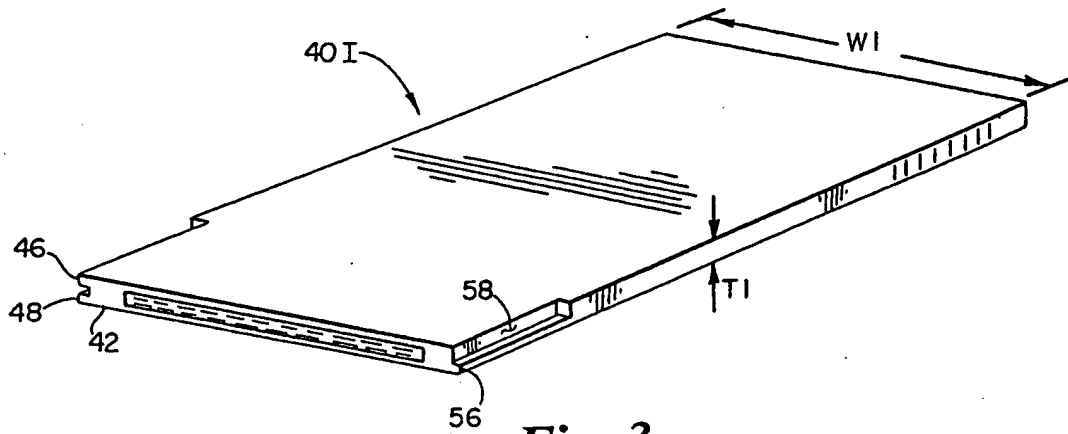


Fig. 3

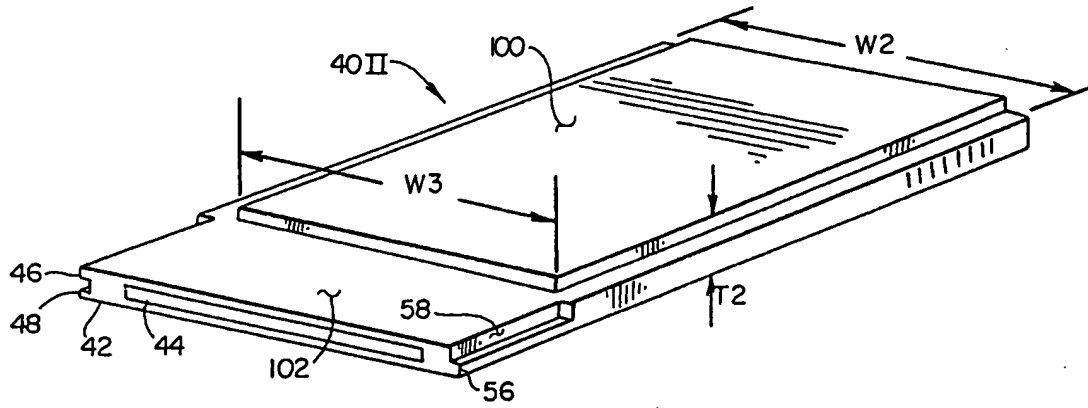


Fig. 4

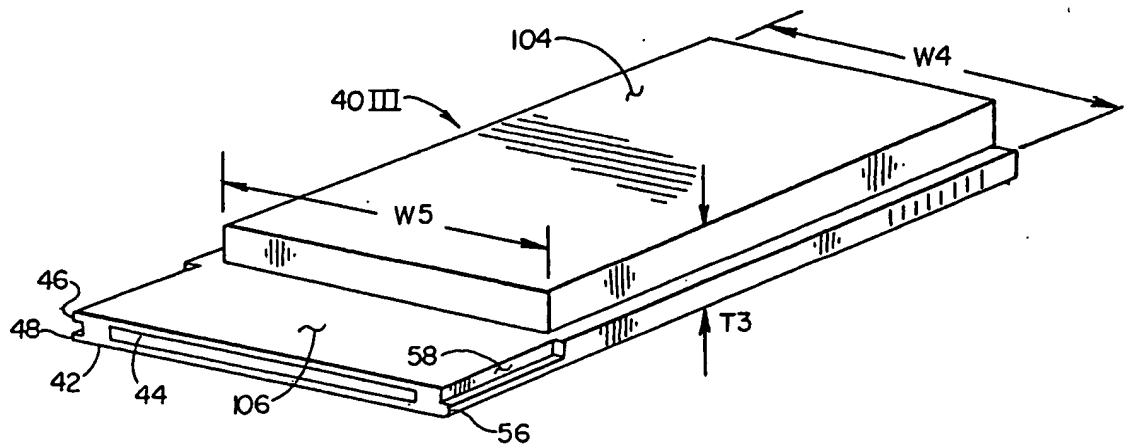
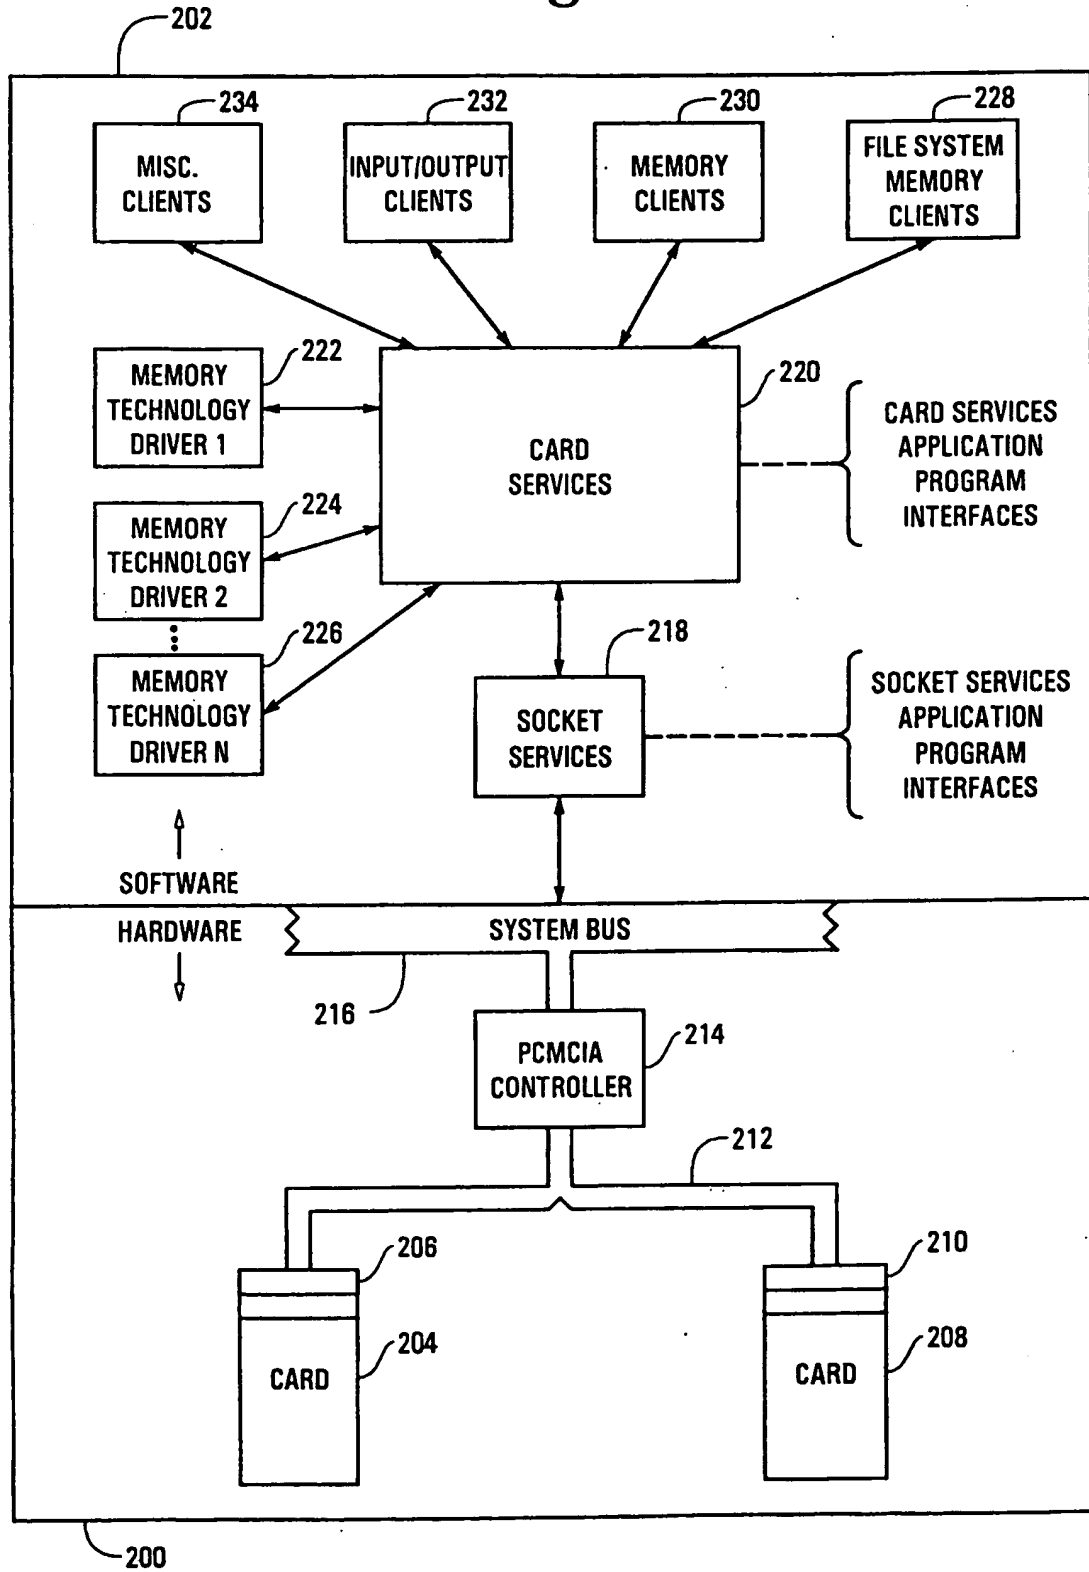


Fig. 5


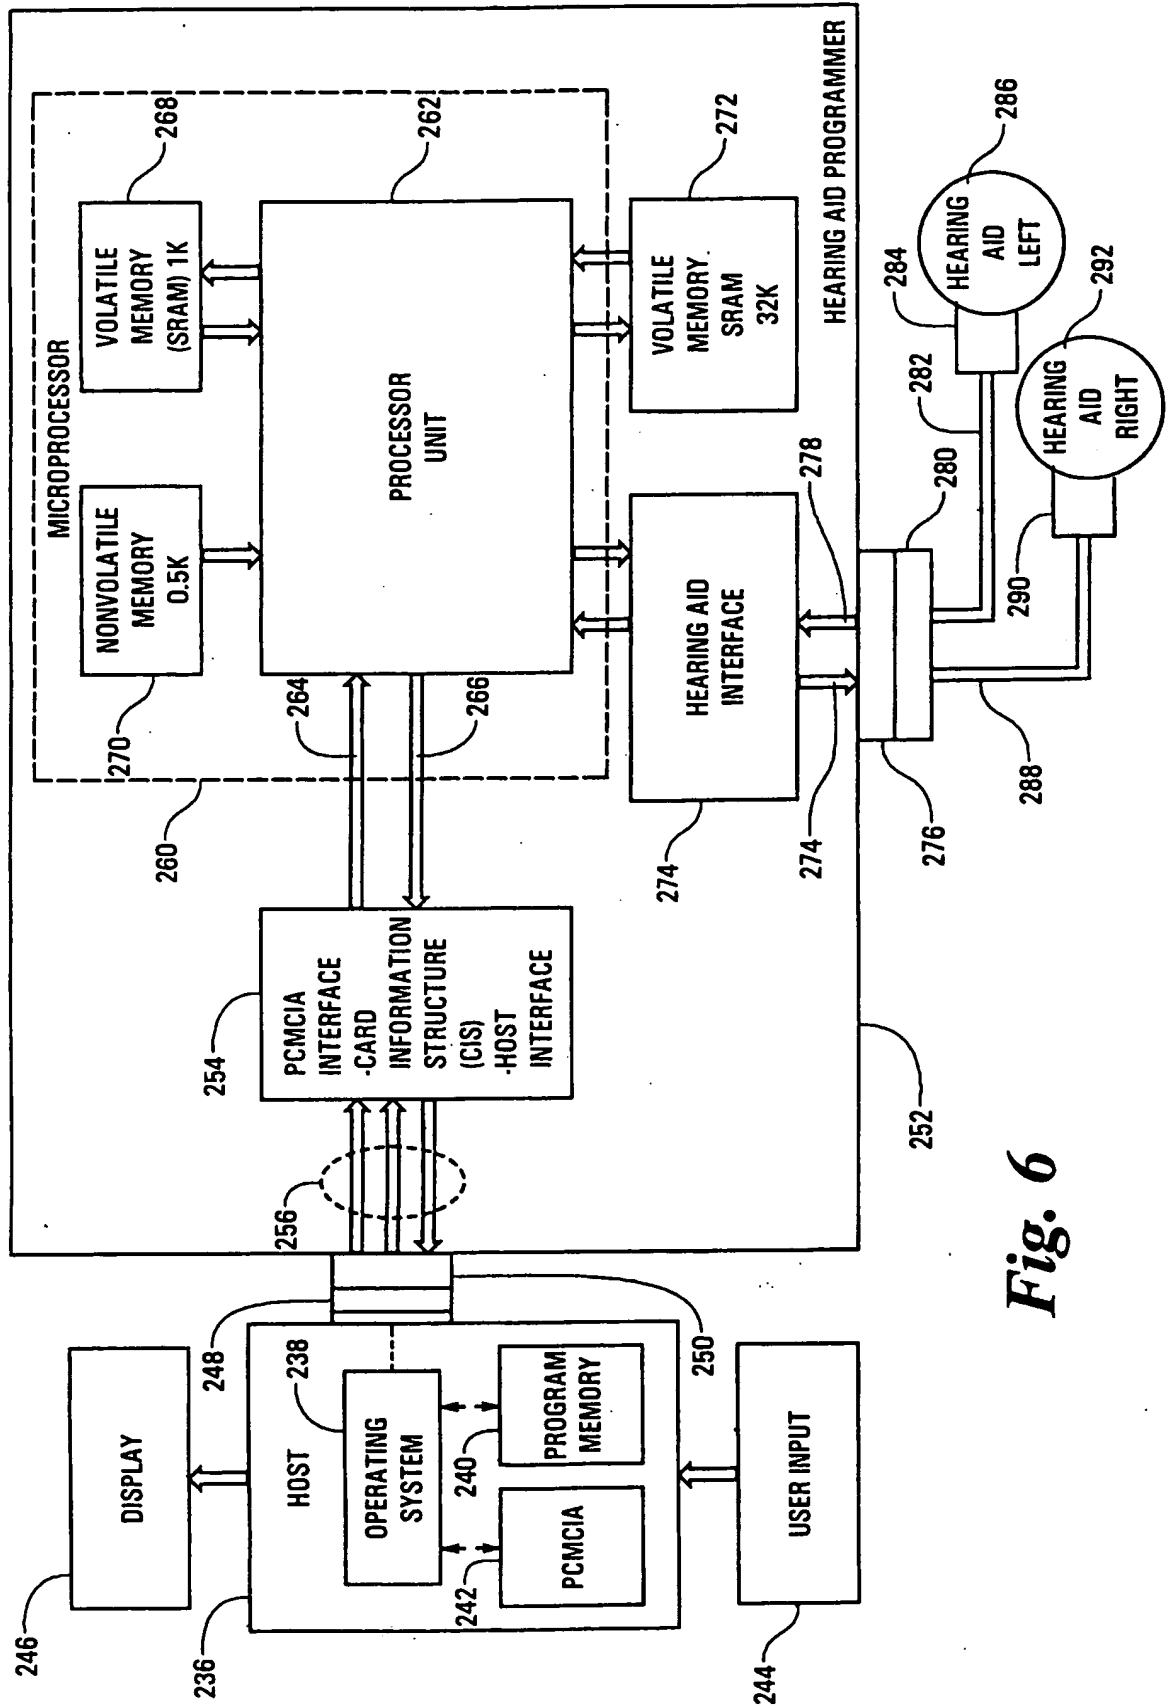


Fig. 7

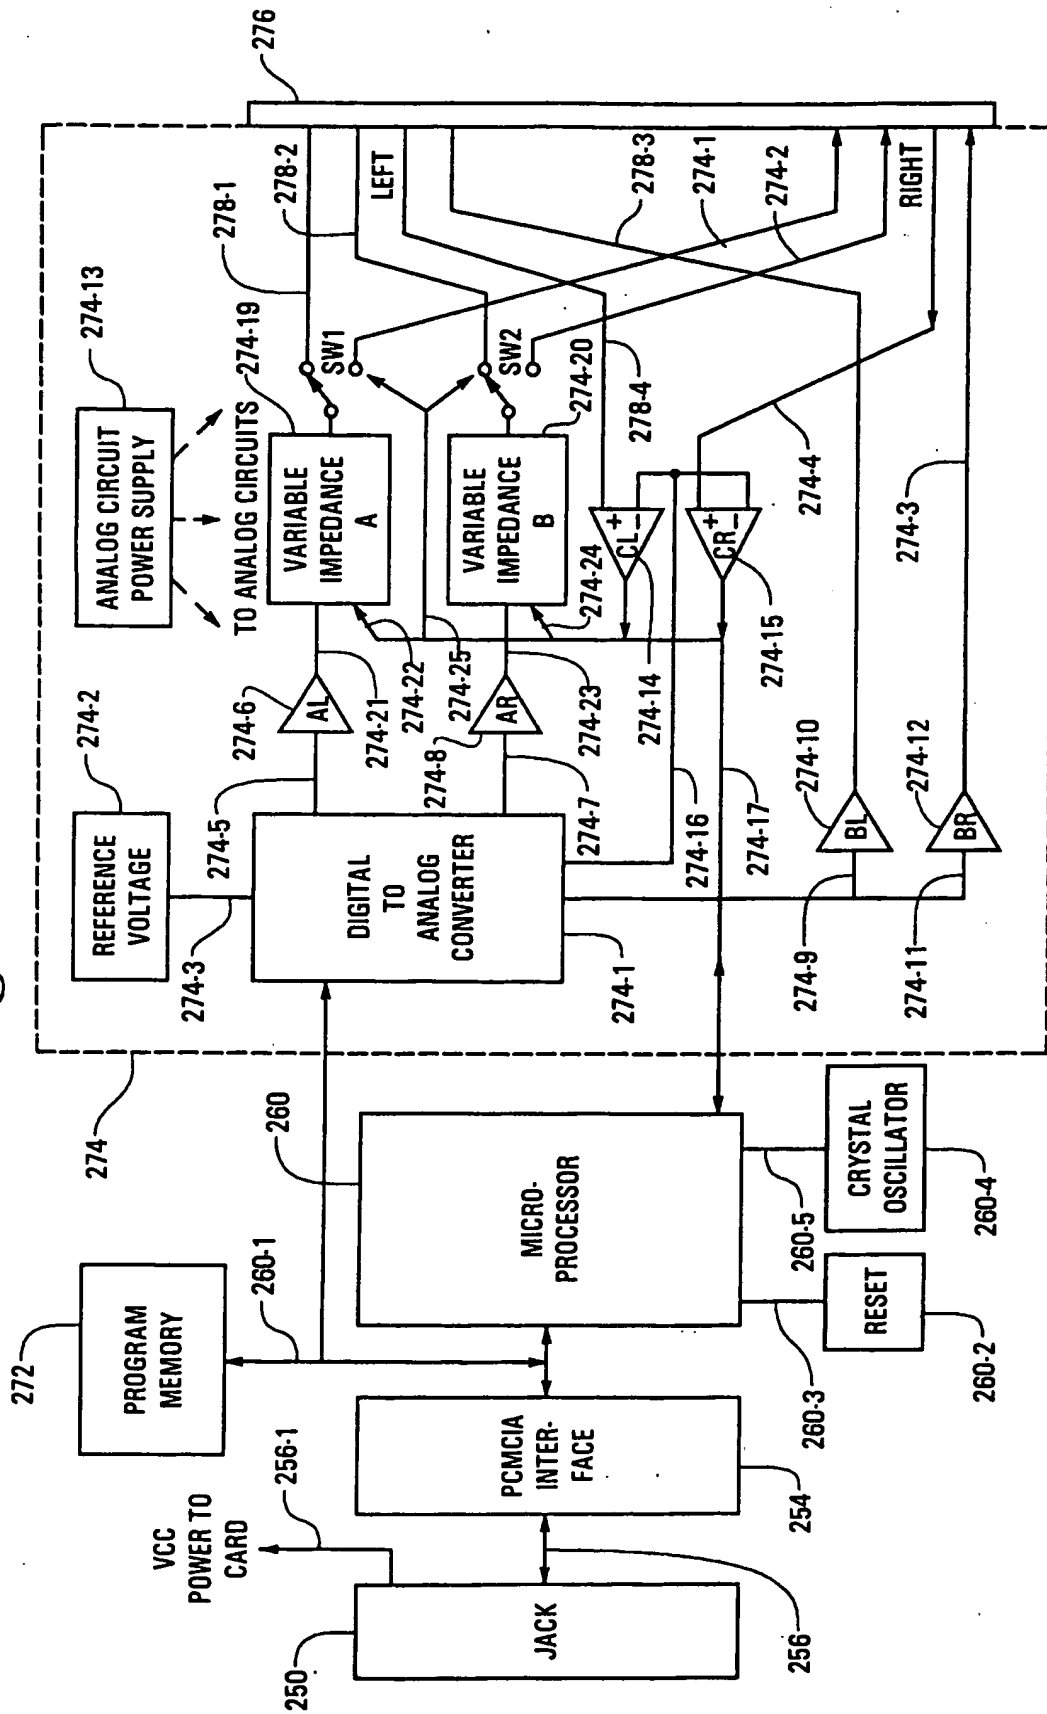

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.